


200mW SOD-523 Surface Mount


Features

- Low Forward Voltage Drop
- Flat Lead SOD-523 Small Outline Plastic Package
- Extremely Small SOD-523 Package
- Moisture Sensitivity: Level 1 per J-STD-020
- Surface Device Type Mounting
- RoHS Compliant
- Green EMC
- Matte Tin(Sn) Lead Finish
- Band Indicates Cathode

SOD-523 Surface Mount

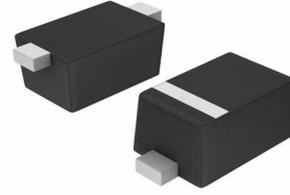

SOD-523

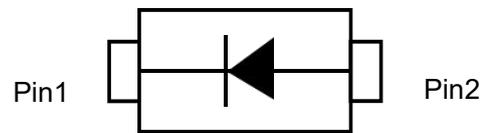

Circuit Diagram

Absolute Maximum Ratings (T_A = 25°C unless otherwise noted)

Symbol	Parameter	Value	Units
P _D	Power Dissipation	200	mW
T _{STG}	Storage Temperature Range	-55 to +125	°C
T _J	Operating Junction Temperature	+125	°C
V _R	Reverse Voltage	40	V
I _{F(AV)}	Average Forward Current	200	nA
I _{FSM}	Peak Forward Surge Current (At 8.3ms single half sine-wave)	1	A

*These ratings are limiting values above which the serviceability of the diode may be impaired

Electrical Characteristics (T_A = 25°C unless otherwise noted)

Symbol	Parameter	Test Condition	Limits		Unit
			Min	Max	
B _V	Breakdown Voltage	I _R =500μA	40		V
I _R	Reverse Leakage Current	V _R =10V		30	μA
V _F	Forward Voltage	I _F =200mA		0.6	V
T _{rr}	Reverse Recovery Time	I _F = I _R = 10mA , I _{R(REC)} = 1.0mA		5.0	nS

Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise Specified)

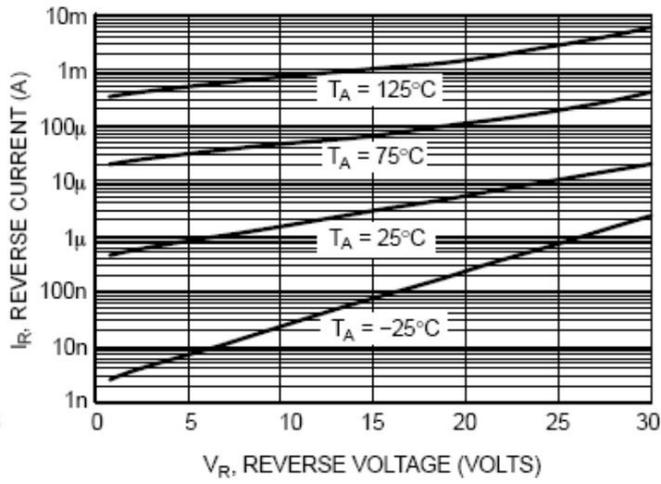


Figure 2. Reverse Characteristics


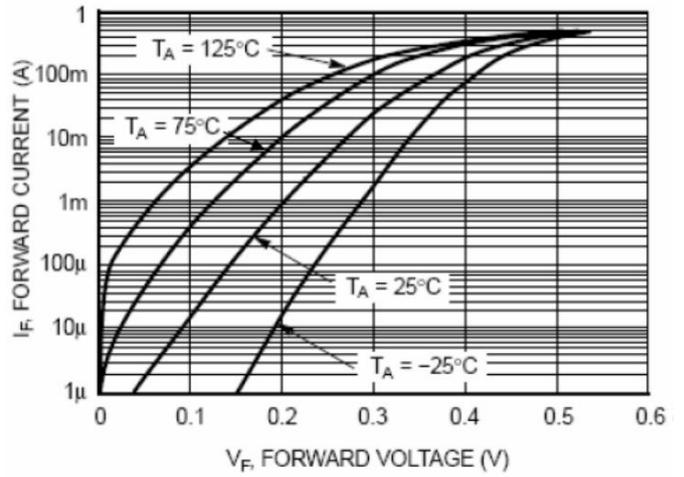



Figure 1. Forward Characteristics

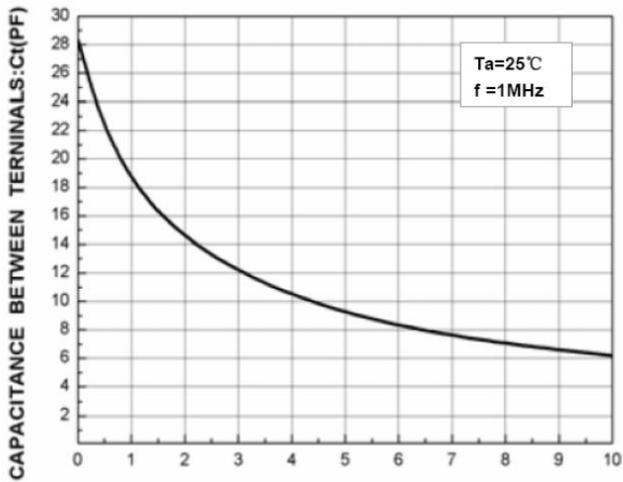

REVERSE VOLTAGE : V_R (V)


Figure3.Total Capacitance

SOD523 Package Outline Drawing

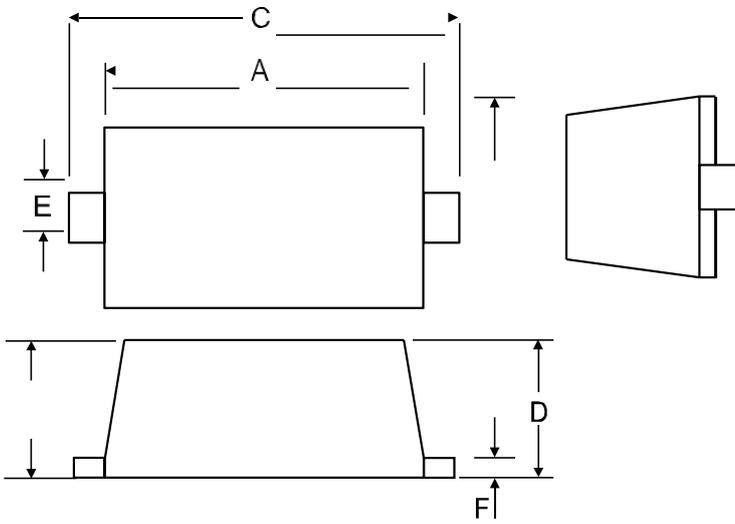

SYM	DIMENSIONS			
	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.10	1.30	0.043	0.051
B	0.70	0.90	0.028	0.035
C	1.50	1.70	0.059	0.067
D	0.50	0.70	0.020	0.028
E	0.25	0.35	0.010	0.014
F	0.10	0.20	0.004	0.008
G	0.50	0.70	0.020	0.028


Suggested Land Pattern

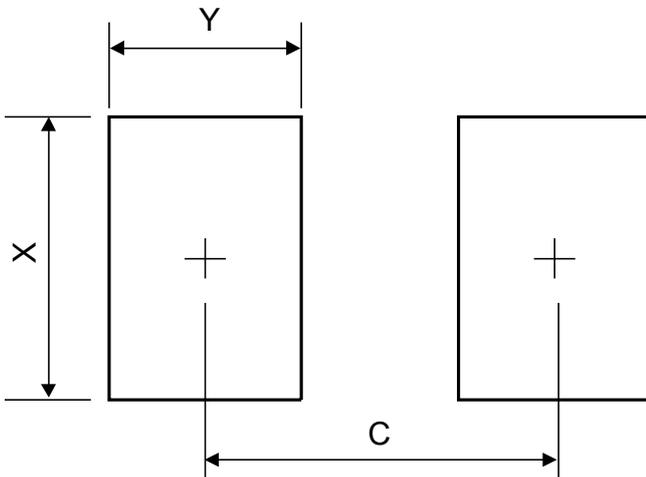



SYM	DIMENSIONS	
	MILLIMETERS	INCHES
C	1.42	0.056
X	0.70	0.028
Y	0.60	0.024

TAPE AND REEL INFORMATION

Reel Dimensions

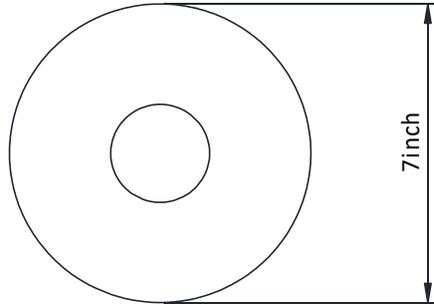

Tape Dimensions

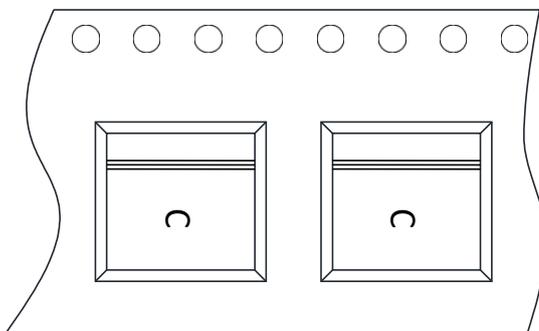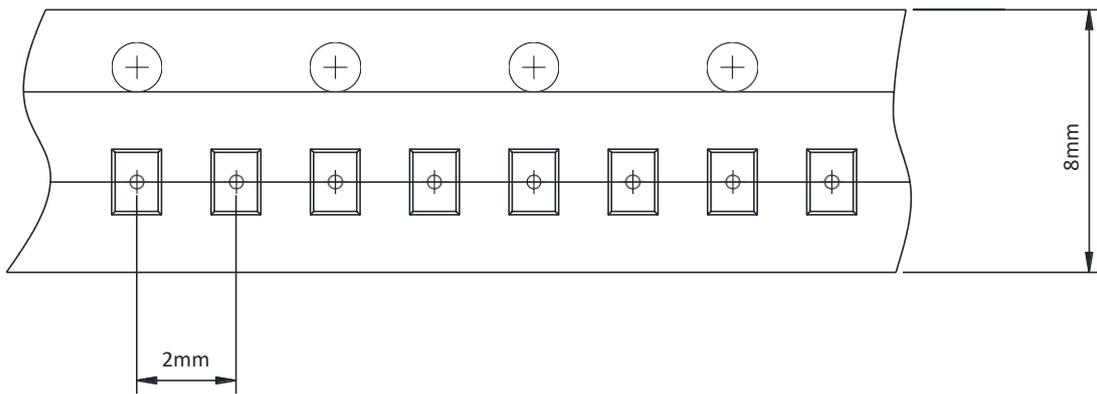

User Direction of Feed