


SOD-323 贴片塑封肖特基二极管

SOD-323

SOD-323 Plastic-Encapsulate Schottky Barrier Diode



Marking: SD103AWS: S4
SD103BWS: S5
SD103CWS: S6

特征 Features

- 大电流承受能力。High Current Capability
- 正向压降低。Low Forward Voltage Drop

机械数据 Mechanical Data

- 封装: SOD-323 封装 SOD-323 Small Outline Plastic Package
- 湿敏等级: 1 Moisture Sensitivity: Level 1 per J-STD-020
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性(TA = 25°C 除非另有规定)

Maximum Ratings & Thermal Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)





参数 Parameters	符号 Symbol	SD103AWS	SD103BWS	SD103CWS	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	VRRM	40	30	20	V
最大均方根电压 Maximum RMS voltage	VRMS	28	21	14	V
最大直流阻断电压 Maximum DC blocking voltage	VDC	40	30	20	V
最大正向平均整流电流 Maximum average forward rectified current	IFM	350			mA
峰值正向浪涌电流 8.3ms 单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	IFSM	1.5			A
功率消耗 Power Dissipation	PD	200			mW
典型热阻 T typical thermal resistance	RθJA	500			°C/W
工作结温 Operating junction temperature	Tj	125			°C
存储温度 Storage temperature range	TSTG	-50-+150			°C

电特性 (TA = 25°C 除非另有规定)

Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified).

参数 Parameters	符号 Symbol	测试条件 Test conditions	SD103AWS	SD103BWS	SD103CWS	单位 Unit
最大正向电压 Maximum forward voltage	VF	IF = 20mA IF = 200mA	0.370 0.550			V
最大反向电压 Maximum reverse breakdown voltage	VR	IR=100uA	40	30	20	V
最大反向电流 Maximum reverse current	IR	VR=30V SD103AWS VR=20V SD103BWS VR=10V SD103CWS	5.0			uA
典型结电容 Type junction capacitance	Cj	VR = 0V, f = 1MHz	50			pF
反向恢复时间 Reverse recovery time	Trr	IF=IR=200mA, Irr=0.1xIR,RL=100 Ω	10			ns


特性曲线 Characteristic Curves

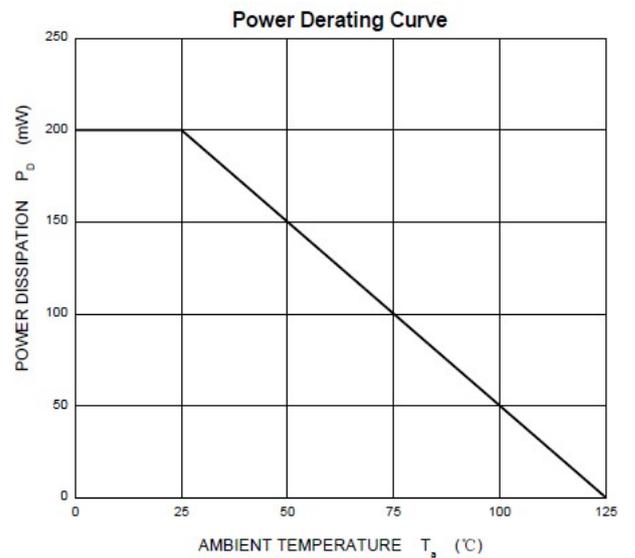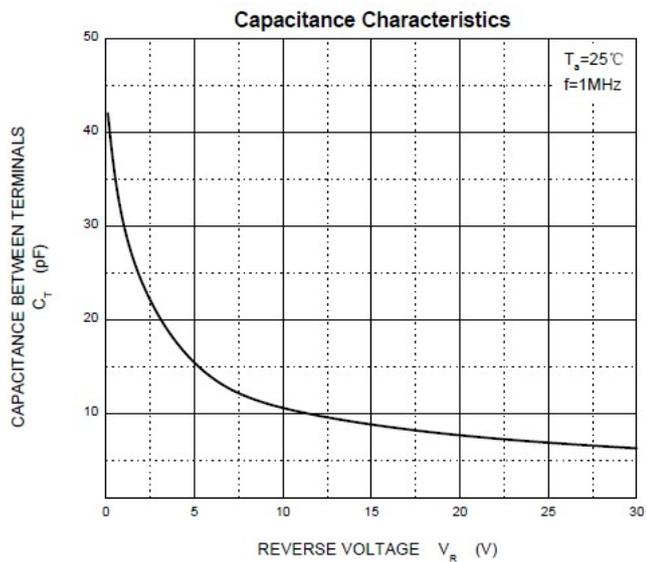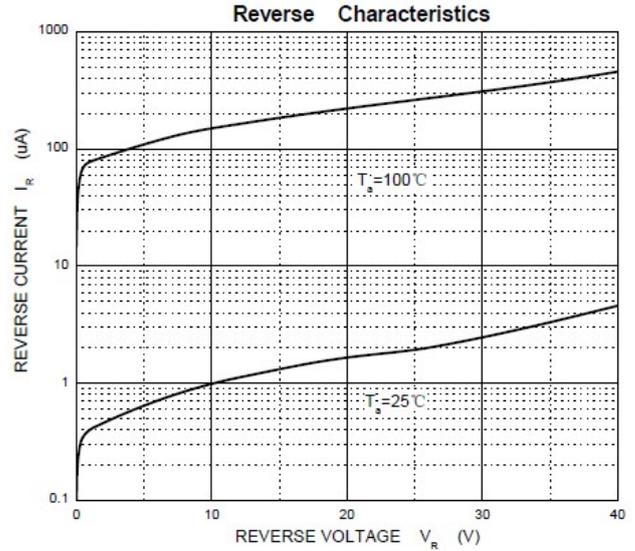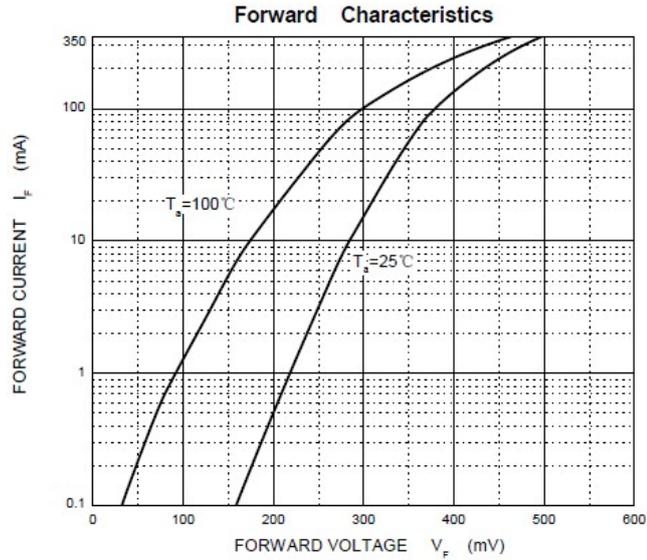

SOD-323 PACKAGE OUTLINE

Plastic surface mounted package


SOD-323

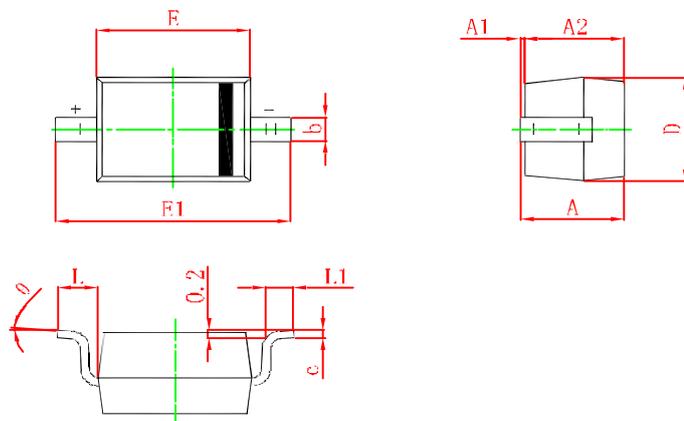



Symbol	Min.(mm)	Max.(mm)
A		1.000
A1	0.000	0.100
A2	0.800	0.900
b	0.250	0.350
c	0.080	0.150
D	1.200	1.400
E	1.600	1.800
E1	2.500	2.700
L	0.475REF	
L1	0.250	0.400
θ	0°	8°

TAPE AND REEL INFORMATION

Reel Dimensions

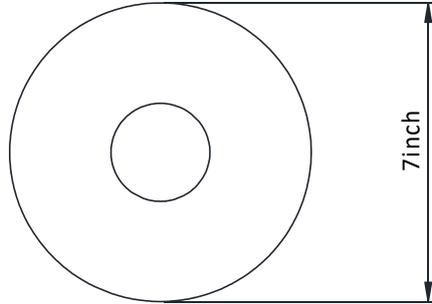

Tape Dimensions

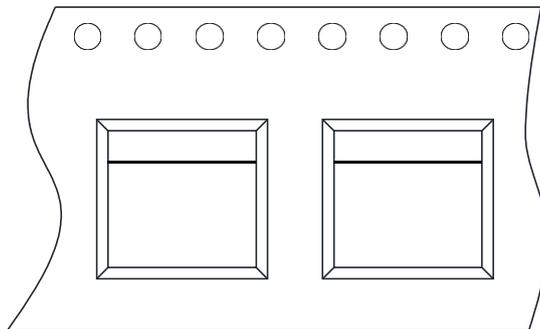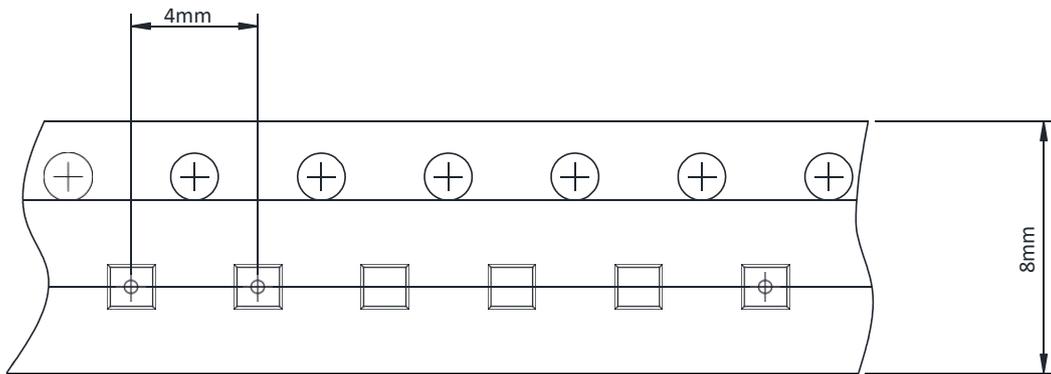

User Direction of Feed